



















EUROPE FILTER 4KG 1.2M (1)


FEATURES

-  This filter is manufactured with fibre-glass and polyester resin.
-  Totally anticorrosive.
-  Fitted with collector arms and diffuser made from unplasticised PVC and polypropilene.
-  Resistent to salted water.
-  Contains newly designed larger and more resistant ABS collector arms.
-  Can be connected to a valve battery.
-  Interior painted with chemicals barrier, giving an excellent product finish.
-  Maximum temperature: 50° C.
-  Maximum working pressure of 4 Kg/cm².

CARACTERÍSTICAS

-  Filtro laminado en fibra de vidrio y poliéster.
-  Totalmente anticorrosivo.
-  Montado con colectores y difusor de material Plástico inalterable PVC y Polipropileno.
-  Resistente al agua salada.
-  Son novedad también los brazos colectores ABS, más resistentes y de mayor tamaño.
-  Posibilidad de acoplarse batería de válvulas.
-  Pintado interior con top-coat, da un excelente acabado al producto.
-  Temperatura máxima: 50° C.
-  Presión máxima de trabajo 4 Kg/cm².

Code	34270	34271	34272	34273	34274	34276	34277	34278
Model (mm)	1050			1200		1400		
Connections (inch)	2"	2 1/2"	3"	2 1/2"	3"	2 1/2"	3"	4"
Filtering velocity (m ³ /h/m ²)	20	30/40	50	20/30	40/50	20	30	40/50
Filtration Area (m ²)	0.86			1.13		1.54		
Flow (m ³ /h)	17	25/34	43	22/33	45/56	30	46	40/50
Maximum pressure (bar)	4							
Sand (0.4-0.8mm) (kg)	1285			1160		2220		
Net weight (kg)	150			200		225		
D (mm)	1050			1200		1400		
H (mm)	2060					2200		
M (mm)	270			350		400		
N (mm)	540			570		615		

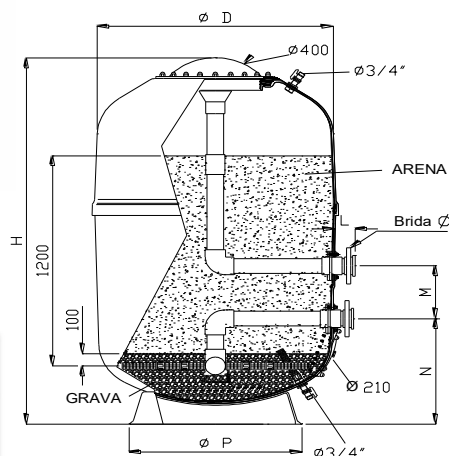










PACKAGING










Code	34270	34271	34272	34273	34274	34276	34277	34278
Model (mm)	1050			1200		1400		
Box dimensions (m)	1.24x1.24x2.2			1.4x1.4x2.2		1.6x1.6x2.32		
Volume (m ³)	3.38			4.31		5.93		

EUROPE FILTER 4KG 1.2M (2)


FEATURES

-  This filter is manufactured with fibre-glass and polyester resin.
-  Totally anticorrosive.
-  Fitted with collector arms and diffuser made from unplasticised PVC and polypropilene.
-  Resistent to salted water.
-  Contains newly designed larger and more resistant ABS collector arms.
-  Can be connected to a valve battery.
-  Interior painted with chemicals barrier, giving an excellent product finish.
-  Maximum temperature: 50° C.
-  Maximum working pressure of 4 Kg/cm².

CARACTERÍSTICAS

-  Filtro laminado en fibra de vidrio y poliéster.
-  Totalmente anticorrosivo.
-  Montado con colectores y difusor de material Plástico inalterable PVC y Polipropileno.
-  Resistente al agua salada.
-  Son novedad también los brazos colectores ABS, más resistentes y de mayor tamaño.
-  Posibilidad de acoplarse batería de válvulas.
-  Pintado interior con top-coat, da un excelente acabado al producto.
-  Temperatura máxima: 50° C.
-  Presión máxima de trabajo 4 Kg/cm²

Code	34280	34281	34282	34285	34286	34287	34288
Model (mm)	1600			1800			
Connections (inch)	3"	4"	4 ½"	3"	4"	4 ½"	5"
Filtering velocity (m ³ /h/m ²)	20	30/40	50	20	30	40	50
Filtration Area (m ²)	2.01			2.54			
Flow (m ³ /h)	40	60/80	100	50	76	101	125
Maximum pressure (bar)	4						
Sand (0.4-0.8mm) (kg)	2950			3680			
Net weight (kg)	338			425			
D (mm)	1600			1800			
H (mm)	2300			2400			
M (mm)				400			
N (mm)	710			725			

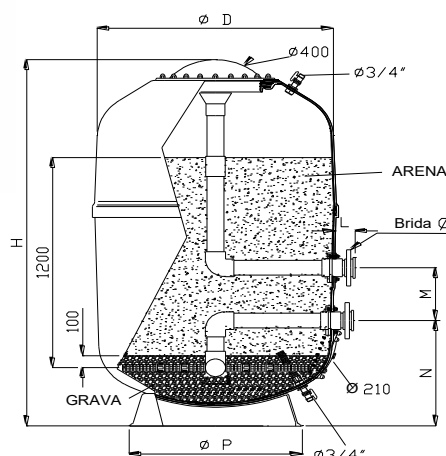

PACKAGING

Code	34280	34281	34282	34285	34286	34287	34288
Model (mm)	1600			1800			
Box dimensions (m)	1.8x1.8x2.5			2x2x2.6			
Volume (m ³)	8.1			10.4			